



[Cupid]

154.2 watts per section
90/70/20 Δt 60°C EN442

The Cupid is a stunning decorative radiator with each column embellished with cherubs, dragons, lions and vines intertwined with each other. This casting is a unique design inspired by the French style of cast radiators and was first manufactured in the late 19th century.

Specifications

Models Available	27+
Materials	Cast Iron
Standard Finish	Black Primer
Connections	2 x 1/2" BSP connections
Pipe Centres	Width of radiator + valves
Delivery Details	Primer / colour: <15 days
Delivery Charge	£60.00 per consignment
Guarantee	10 years
Output range	462.6 –4626 watts



[Black primer as standard]

[Any RAL colour]

[Any Farrow & Ball "Heritage" colour]


[Hand polished finish]



2 Grand Parade Polegate East Sussex BN26 5HG
Telephone: +44 (0)1323 486848
info@radiatorcentre.com www.radiatorcentre.com

[Cupid]

CODE	Height (mm)	Width (mm)	Depth (mm)	Projection (mm)	Sections (No)	Power (watts)
Cupid 800/3	800	216	200	232-242	3	462.6
Cupid 800/4	800	276	200	232-242	4	616.8
Cupid 800/5	800	336	200	232-242	5	771
Cupid 800/6	800	396	200	232-242	6	925.2
Cupid 800/7	800	456	200	232-242	7	1079.4
Cupid 800/8	800	516	200	232-242	8	1233.6
Cupid 800/9	800	576	200	232-242	9	1387.8
Cupid 800/10	800	636	200	232-242	10	1542
Cupid 800/11	800	696	200	232-242	11	1696.2
Cupid 800/12	800	756	200	232-242	12	1850.4
Cupid 800/13	800	816	200	232-242	13	2004.6
Cupid 800/14	800	876	200	232-242	14	2158.8
Cupid 800/15	800	936	200	232-242	15	2313
Cupid 800/16	800	996	200	232-242	16	2467.2
Cupid 800/17	800	1056	200	232-242	17	2621.4
Cupid 800/18	800	1116	200	232-242	18	2775.6
Cupid 800/19	800	1176	200	232-242	19	2929.8
Cupid 800/20	800	1236	200	232-242	20	3084
Cupid 800/21	800	1296	200	232-242	21	3238.2
Cupid 800/22	800	1356	200	232-242	22	3392.4
Cupid 800/23	800	1416	200	232-242	23	3546.6
Cupid 800/24	800	1476	200	232-242	24	3700.8
Cupid 800/25	800	1536	200	232-242	25	3855
Cupid 800/26	800	1596	200	232-242	26	4009.2
Cupid 800/27	800	1656	200	232-242	27	4163.4
Cupid 800/28	800	1716	200	232-242	28	4317.6
Cupid 800/29	800	1776	200	232-242	29	4471.8
Cupid 800/30	800	1836	200	232-242	30	4626

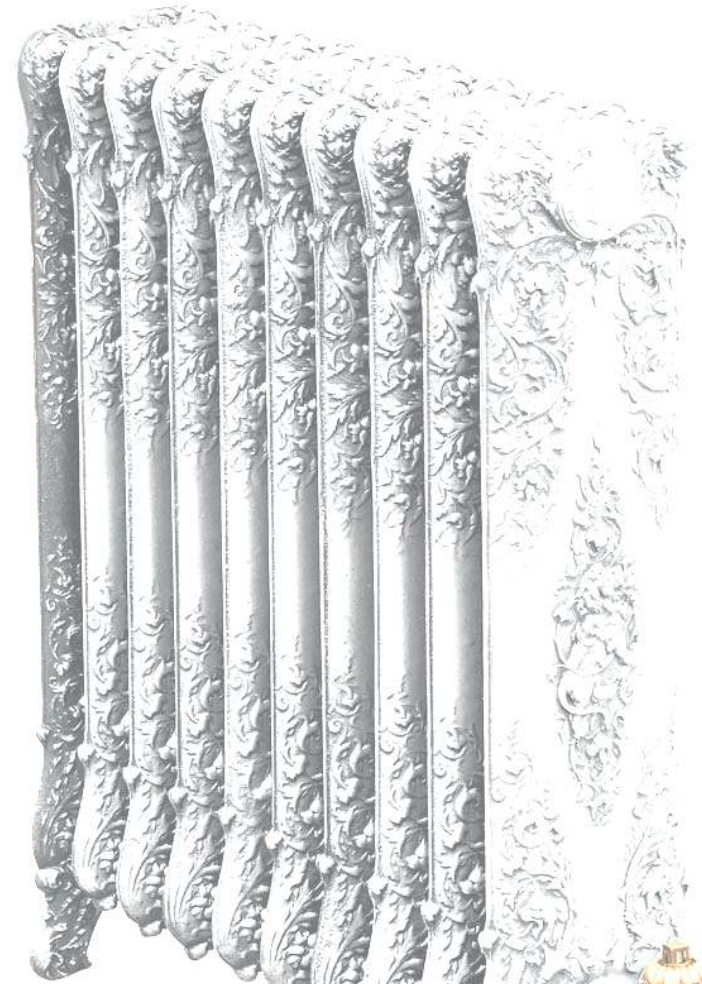

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

